

Global leaders in Sealing Solutions

DURLON[®] SEALING SOLUTIONS



- **Compressed Non-Asbestos Sheets**
- **PTFE Sheets/Gaskets**
- **Water/Sanitation NSF/ANSI 61 Gaskets**
- **Flexible Graphite Sheets/Gaskets**

- **High Temperature Sheets/Gaskets**
- **Low Seating Stress Gaskets**
- **Semi Metallic Gaskets**
- **Metallic Gaskets**

PROVIDING INNOVATIVE & HIGH-QUALITY FLUID SEALING SOLUTIONS



Durlon® HT1000®

Phlogopite Mica with Silicone Binder
S90, L316, T316
*HT1000® is a registered trademark of
Triangle Fluid Controls Ltd.*

Durlon® HT1000® consists of phlogopite mica paper impregnated with an inorganic binder at less than half the binder amount found in vermiculite-phyllsilicate filled products. This lower binder content allows for superior weight retention, less than 4% weight loss at 800°C (1,472°F), and results in ultimate extreme temperature sealing performance up to 1,000°C (1,832°F). Durlon® HT1000® characteristics allow for it to be used as a sealing material on its own or combined with various carrier media in heat exchangers, exhaust manifolds, and other equipment commonly found in the refinery, power generation, and chemical industries.



Durlon® 8300

Carbon Fiber with NBR Rubber Binder
Compressed Non-Asbestos Gasket Material
ASTM F104: F712120-A9B3E22K5L311M5

Durlon® 8300 is a premium grade compressed sheet gasket material that is excellent in steam and hydrocarbon services for the refining, petrochemical, and power generation industries. This gasket material is designed to handle the extreme pressure and temperature applications that include oil, water, mild alkalis, mild acids and solvents.



Durlon® 5000

Mineral Fiber with NBR Rubber Binder
Compressed Non-Asbestos Gasket Material
ASTM F104: F712120-A9B4E12K5L051M5

A good quality commercial grade compressed non-asbestos sheet with good chemical resistance for moderate service conditions suitable for oil, water, mild alkalis, mild acids, hydrocarbons and solvents.



Durlon® 8400

Phenolic Fiber with NBR Rubber Binder
Compressed Non-Asbestos Gasket Material
ASTM F104: F712120-A9B4E22K5L911M5


With an extremely wide pH application range (2-13 at room temp.) Durlon® 8400 can be used in process piping and equipment in chemical, pulp & paper and other general industrial applications. A unique high-performance compressed sheet, Durlon® 8400 is an excellent gasket material for use in steam, mild caustics and acids.



Durlon® 7900/7925/7950

Aramid with NBR Rubber Binder
Compressed Non-Asbestos Gasket Material
ASTM F104: F712120-A9B3E22K5L151M5

Durlon® 7900/7925/7950 are an economy grade general service gasket sheet material made with NBR (Nitrile Butadiene Rubber) binder for mild service in piping and equipment with applications in steam, hydrocarbons and refrigerants and an alternative when temperature and pressure conditions are below 500°F (260°C) and 1,200 psig.



Durlon® 8500

Aramid/Inorganic with NBR Rubber Binder
Compressed Non-Asbestos Gasket Material
ASTM F104: F712120-A9B3E12K5L151M6

A high performance compressed gasket material for use in process industries including pulp & paper, food & beverage, pharmaceutical, hydrocarbon, chemical, refinery and general industry. Durlon® 8500 is suitable for oils, water, steam, new generation refrigerants, dilute acids and alkalis, and many other liquids and gases.



Durlon® 7910

Aramid with NBR Rubber Binder
Compressed Non-Asbestos Gasket Material
ASTM F104: F712120-A9B3E22K5L151M5

As a quality, commercial grade compressed sheet gasket material, Durlon® 7910 was specifically developed to meet the requirement of NSF/ANSI 61 (Certification for water treatment products that are manufactured, distributed or sold in North America) for potable water application 23°C (73°F) to commercial hot 82°C (180°F).

Durlon® 7910 is manufactured by Durabla® Canada Ltd. NSF International is a global independent organization that writes standards and protocols, and tests and certifies products for the food, water and consumer goods industries to minimize adverse health effects and protect the environment. www.nsf.org



Durlon® 8600

Aramid/Inorganic with SBR Rubber Binder
Compressed Non-Asbestos Gasket Material
ASTM F104: F712440-A9B3E24K5L152M5

Durlon® 8600 is a quality compressed sheet gasket material for use in process industries including pulp & paper, power, petrochemical as well as general industry where a "white" gasket material is often required when working with food & beverage, pharmaceutical and plastics.


PROVIDING INNOVATIVE & HIGH-QUALITY FLUID SEALING SOLUTIONS



Durlon® 8700

Aramid/Inorganic with CR Rubber Binder
Compressed Non-Asbestos Gasket Material
ASTM F104: F712330-A9B5E45K5L153M5

Durlon® 8700 is a high performance gasket material for use in processes requiring a neoprene (CR) bonded sheet and has excellent hand and die cutting characteristics. This product has excellent resistance to oils, non-aromatic solvents and many refrigerants.



Durlon® 9002

Inorganic Filler with Pure PTFE Resins
Filled PTFE Gasket Material
ASTM F104: F452111-A9B5E11K6M6

Durlon® 9002 is an adaptation of the original glass-filled formula to better meet extreme cryogenic demands and is readily available through the standard manufacturing process and requires no secondary heat or cleansing treatments prior to gasket cutting. Once gaskets are cut, traditional oxygen cleaning standards must be applied for safety.

Available as oxygen cleaned gaskets, bagged, labeled, and sealed according to the European Industrial Gases Association standard for Cleaning of Equipment for Oxygen Service.



Durlon® 8900

Aramid-Graphite with NBR Rubber Binder
Compressed Non-Asbestos Gasket Material
ASTM F104: F712120-A9B2E21L101M6

A premium grade material for service conditions to 496°C (925°F) and continuous operating temperatures of -40°C to 400°C (-40°F to 752°F). Durlon® 8900 is ideal for saturated and superheated steam, oil, dilute acids and alkalis, hydrocarbons and solvents.



Durlon® 9200

Barium Sulfate Filler with Pure PTFE Resins
Filled PTFE Gasket Material
ASTM F104: F451-A9B2M6

Durlon® 9200 is a filled PTFE gasket material used where resistance to highly aggressive chemicals is required. Barium sulfate fillers are homogeneously blended with pure PTFE resins to give Durlon® 9200 its physical and mechanical properties.



Durlon® 9000

Inorganic Filler with Pure PTFE Resins
Filled PTFE Gasket Material
ASTM F104: F452111-A9B5E11K6M6

Durlon® 9000 is for use in process piping and equipment in chemical, pulp & paper, food & beverage and other general industrial applications where resistance to highly aggressive chemicals is required. In addition, the shape of the fillers do not allow wicking which can cause corrosion on flange surfaces and conforms to FDA requirements. And has achieved numerous certifications: WRAS (Water Regulations Advisory Scheme) Approved Material, USP Class VI, FDA and (EC) 1935/2004 & EU (10/2011) compliant, TA-luft (VDI Guideline 2440), ABS-PDA & Pamphlet 95, the chlorine institute, DNV-GL. And has passed the API 6FA fire test.



Durlon® 9400

Carbon Filler with Pure PTFE Resins
Filled PTFE Gasket Material
ASTM F104: F452111-A9B5E11K6M6

Durlon® 9400 is a high performance filled PTFE gasket material designed for use in piping and equipment, chemical, and other general industrial applications where resistance to highly aggressive chemicals (including hydrofluoric acid) is required. Durlon® 9400 can also be used as the gasket of choice for anhydrous hydrogen fluoride (AHF) in railroad tank cars and a good alternative for use in plants where barium sulfate filled PTFE may not be suitable.



Durlon® 9000N

Inorganic Filler with Pure PTFE Resins
Filled PTFE Gasket Material
ASTM F104: F452111-A9B5E11K6M6

Durlon® 9000N is for use in process piping and equipment in chemical, pulp & paper, food & beverage and other general industrial applications where resistance to highly aggressive chemicals is required. In addition, the shape of the fillers do not allow wicking which can cause corrosion on flange surfaces and conforms to FDA requirements.



Durlon® 9600

Expanded PTFE
100% Pure PTFE Gasket Material
ASTM F104: F428111-A9B4E11M6

Durlon® 9600 is a biaxially expanded PTFE gasket, made with only pure PTFE resins, designed for use in process piping and equipment, in chemical, pulp and paper, food and beverage, and other general industrial applications, where resistance to highly aggressive chemicals is required. Durlon® 9600 is also suitable for sealing flanges with irregular surfaces. It has excellent sealability, cuts easily and separates cleanly from flanges after use. This material is FDA compliant, ABS-PDA & USP Class VI, and TA-Luft certified.

PROVIDING INNOVATIVE & HIGH-QUALITY FLUID SEALING SOLUTIONS



Durlon® 9645

Microcellular PTFE with Rigid PTFE core
ASTM F104: F497130E21M4

The Durlon® 9645 product range offers a biaxially-oriented PTFE sheet solution that combines superior chemical resistance with exceptional sealing performance, making it an optimal choice for demanding industrial applications.

The rigid PTFE core minimizes cold flow and creep, significantly enhancing durability and long-term performance. It also improves handleability and simplifies installation, particularly on large-diameter flanges or in hard-to-reach locations.



Durlon® LT 100 - EPDM/PTFE

Pure PTFE, Bonded to EPDM

The Durlon® LT 100 is a high-performance gasket material that permanently bonds EPDM rubber with PTFE, offering excellent compression set and chemical resistance for low-torque applications. Its double-rib design suits both flat-face and raised flanges, while a one-piece PTFE shield ensures superior sealing performance. Made with FDA-compliant ingredients, it's a reliable choice for use in regulated industries.



Durlon® Virgin PTFE

100% Pure PTFE Gasket Material
Available in two grades:
Skived and Reprocessed

Durlon® Virgin PTFE gasket material is a high performance PTFE product designed for use in piping and equipment in chemical and other general industrial applications where resistance to highly aggressive chemicals (including hydrofluoric acid) is required.

Durlon® Virgin PTFE is made with only pure PTFE resins, demonstrates high dielectric strength, has excellent sealability characteristics, cuts easily and separates cleanly from flanges after use.



Durlon® Joint Sealant

100% Pure Expanded PTFE
Gasket Material

Durlon® Joint Sealant (PTFE Adhesive) is a highly fibrillated expanded PTFE form-in-place sealant for gasketed joints and conforms to FDA requirements.

Supplied on spools, Durlon® Joint Sealant comes in various thicknesses with a high quality adhesive backing to ease in installation; making it ideal for worn flanges of all sizes and is not dependent on flange dimensions.



Durlon® SecureSnap

Inorganic Filler with Pure PTFE Resins
Filled PTFE Gasket Material
ASTM F104: F452111-A9B5E11K6M6

Our next level of manway sealing for the rail car industry features a single "Universal Style" gasket that can accommodate several model sizes. The flexibility of the SecureSnap™ manway gasket enables the user to install the gaskets more quickly than the conventional gasket. Flexible tabs easily snap into the groove bottom, eliminating the need for tight tolerances associated with conventional style gaskets.

The flexibility of the SecureSnap™ manway gasket also renders the gaskets more versatile than the conventional gasket. The SecureSnap™ gasket will accommodate more than one style of manway system (dependent on end user approval) allowing distributors to stock one size of gasket for multiple manway designs, therefore reducing inventory and overall cost.



Durlon® 9000 SRG

Inorganic Filler with Pure PTFE Resins
Filled PTFE Gasket Material
ASTM F104: F452111-A9B5E11K6M6

Gasket Resources Inc. has improved upon the original design of the "glued" (SRG) Step Ring Gasket that has been the industry standard for years. The old design Step Ring Gasket consisted of a 1/16" thick standard ring section plus a 1/16" thick inner ring section bonded together with an adhesive.

GRI is able to CNC machine Step Ring Gaskets out of a single piece of Durlon® 9000, all while maintaining the same dimensional design. The solid piece construction prevents the possibility of gasket separation and the unneeded maintenance cost of gasket material ending up in your process. Our easy to install Durlon® 9000 Step Ring Gaskets are great for low bolt load applications and raised face flanges that easily deflect.

PROVIDING INNOVATIVE & HIGH-QUALITY FLUID SEALING SOLUTIONS




Durlon® RCA®

Reduced Contact Area Full Face Gasket
PTFE & Compressed Non-Asbestos
Gasket Material

RCA® is a registered trademark of Gasket Resources Inc.

Durlon® RCA® sealing system combined with Durlon® PTFE styles can replace standard full gaskets in FRP, PVC and other non-metallic and metallic pipe flanges where a low stress gasket is required. The RCA® configuration can be cut from standard PTFE & CNA sheets resulting in a cost savings versus other low stress gaskets.

AVAILABLE MATERIALS: 1/16" & 1/8" Durlon® PTFE styles and Compressed Non-Asbestos styles.



Durlon® ETG

Extreme Temperature Gaskets
SWG/Durtec®/Kammprofile

Durlon® Extreme Temperature Gaskets (ETG) are engineered for reliable sealing in applications exceeding 650°C (1,200°F) and up to 1,000°C (1,832°F). These gaskets combine an oxidation-resistant barrier with the stability and sealing performance of flexible graphite, ensuring long-term seal integrity. By retaining initial flange assembly torque even at extreme temperatures, Durlon® ETG provides a robust solution for maintaining tight, leak-free joints in the most demanding environments.



Durlon® CFG

Corrugated Flexible Graphite Gasket

Durlon® CFG is a corrugated flexible graphite gasket material designed for severe service conditions. The proprietary design of the corrugations gives Durlon® CFG superior sealing and recovery characteristics for tough conditions in the refining, chemical, petrochemical, and pulp & paper industries. Durlon® CFG is suitable for service in steel, oil, mild alkalis, mild acids, hydrocarbons, and solvents.

Durlon® CFG consists of flexible graphite laminated with an adhesive bond on both sides of a corrugated 316 stainless steel core. For consolidation of inventories and applications standardization, Durlon® CFG is available for all applications in 3/32" (2.4mm) thickness (1/16" and 1/8" thickness is also available).




Durlon® Flexible Graphite

Homogeneous, 316SS Foil Insert
316SS Tang Insert, 316SS Multilayer

Durlon® Flexible Graphite is unaffected by heat over a wide range of temperatures. It exhibits low electrical resistivity and high thermal conductivity and is suitable for cryogenic temperatures and is available in several styles.


These include homogeneous sheet and laminated styles with various types of core materials. Durlon® Flexible Graphite can also be special ordered with various inhibitors, grades of graphite, and core materials to suit specific critical applications.

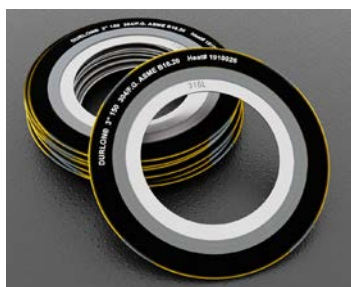

Durlon® SWG

Spiral Wound Gaskets
Style: D, DR & DRI
ASME B16.20 Standards

Durlon® Spiral Wound Gaskets are made with an alternating combination of a preformed engineered metal strip and a more compressible filler material which creates an excellent seal when compressed. The engineered shape of the metal strip acts as a spring under load, resulting in a very resilient seal under varying conditions. The strip metallurgy and filler material can be selected to seal a wide range of applications. All Class 150 & 300 Durlon® SWG styles have been engineered to precise manufacturing tolerances and utilize optimal winding density that allow for lower stress (bolt load) sealing compared to conventional spiral wound gaskets thus eliminating the need to stock both standard and low stress SWG's.



Durlon® Kammprofile

Serrated Flat Metal Gaskets
Grooved metal gasket with covering layers

Durlon® Kammprofile gaskets have a solid metal core with concentrically serrated grooves machined into the top and bottom faces. The metal core is typically stainless steel, but it can be supplied in various metallurgies as per the customer's request.



Durlon® Durtec®

Specially Engineered Metal Core Technology
Durtec® is a registered trademark of
Triangle Fluid Controls Ltd.

Durlon® Durtec® gaskets feature a proprietary, virtually uncrushable machined metal core bonded with soft layers like flexible graphite. This precision design ensures superior mechanical support and excellent sealing, even under low bolt loads.

PROVIDING INNOVATIVE & HIGH-QUALITY FLUID SEALING SOLUTIONS



OUR CUSTOM CAPABILITIES

Durlon® prides itself in offering high-quality fabricated sealing components with high-precision and fast turnaround capabilities. Our state-of-the-art research and development facilities are geared to meet the ever-changing demands required in today's variety of service conditions.

This is the reason why we use some of the most modern and sophisticated processes to meet your custom needs.

The following list of our custom capabilities is why we invest back into our companies to bring you the very best in sealing solution technology.

- Flash Cutter
- PTFE Welding
- CNC Lathe Cutting
- Custom Fabricated Metallic Gaskets
- Custom Metallurgy
- Kammprofile/Durtec® Gaskets
- Water Jet Cutting
- Laser Metal Cutting
- Hydraulic Bender
- Laser Marking
- RCA® Gaskets
- PTFE Manufacturing/Skiving
- AutoCad and Design
- Lab Capabilities
- Metal Tracing



280 Boot Road, Downingtown, PA 19335
1814 Hwy. 146 S. Suite 500 La Porte, TX 77571
Phone: (610) 363.5800 | Toll-Free: (866) 707.7300
Email: sales@durlon.com
gasketresources.com | durlon.com

ISO 9001: 2015 | Copyright 2025, Gasket Resources Inc.,
All Rights Reserved REV. 2025/03

Distributed by: